


Rückansicht / Rear View

Seitenansicht / Lateral View

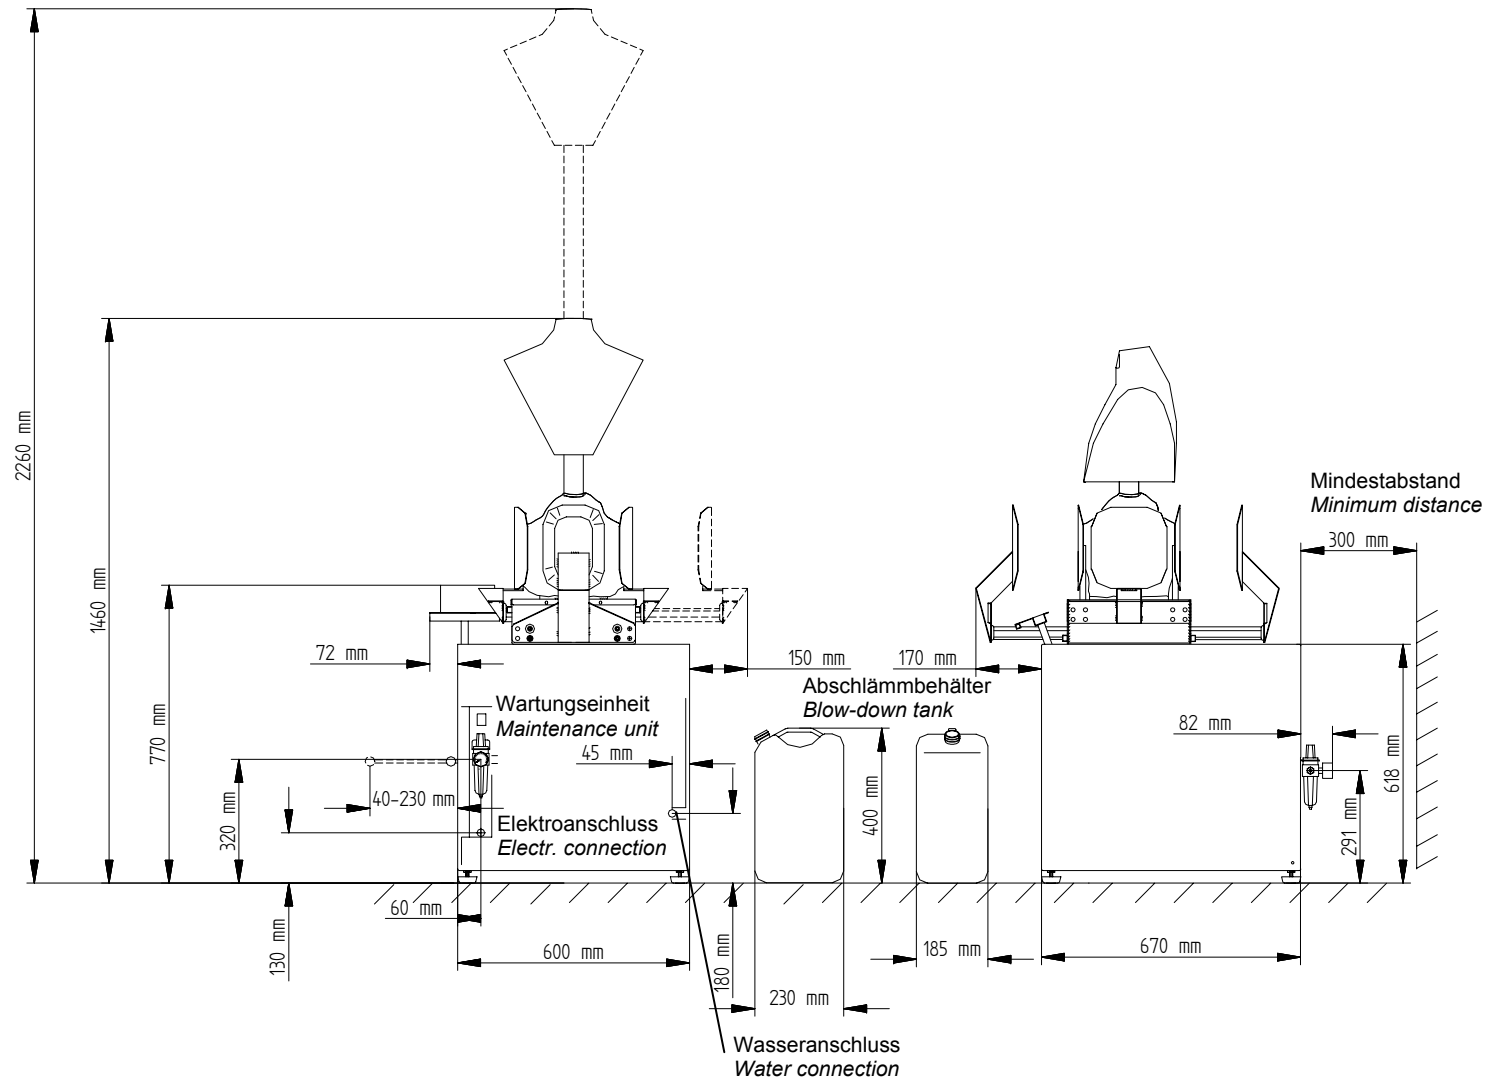

Elektrischer Anschluss

V	400
Hz	50-60
kW	9
Netzseitige Absicherung	3x16 A
Druckluftanschluss	Normalwert (NW) 6 bar Schlauchtülle Di=6 mm; Da=12 mm
Sattdampfleistung	11,7 kg/h
Zulässiger Betriebsüberdruck	6,0 bar
Eingestellter Betriebsdruck	5,0 bar
Wasserinhalt (NW)	3,0 l
Wasseranschluss	1/2"
Kesselvolumen	6,5 l

Maße und Gewicht

Höhe	min.1500 bis max.2300 mm (bei ausgefahrener Bürste)
Breite	580 mm
Tiefe	660 mm
Gewicht	140 kg
Schalldruckpegel gemessen in 1 m Abstand und 1,6 m Höhe:	Blasen: 71 dB(A) Dämpfen: 82 dB(A)

Electrical connection

V	400
Hz	50-60
kW	9
Fuse protection	3x16 A
Compressed air connection	nominal value 6 bar hose nozzle diam. ins. = 6 mm; diam. outs. = 12 mm
Capacity of saturated steam	11.7 kg/h
Admissible operating overpressure	6 bar
Operating pressure set	5 bar
Water contents (min. water level)	3.0 l
Water connection	½"
Boiler volume	6.5 l

Dimensions and weight

Height	min. 1500 to max. 2300 mm (when the form is lifted) min. 59 to max. 90.5 inch (when the form is lifted)
Width	580 mm / 23 inch
Depth	660 mm / 26 inch
Weight	140 kg / 308 lbs
Sound intensity level (height 1.6 m; distance 1 m from the front of the machine)	Blowing: 71 dB(A) Steaming: 82 dB(A)